

Clog-Free Floor Troughs


Eliminate Drain Clogs While Providing Safer Kitchen Floors

FEATURES

- 14-gauge heavy-duty Type-304 stainless steel all-welded construction
- Continuous perforated stainless steel basket strainer
- All seams welded and polished to match adjacent finish
- Unique grout locking holes around flange perimeter
- 3½" (89) diameter drain connection
- Units 96" (2438) and larger have 2 drains
- Non-slip heavy-duty fiberglass ADA-compliant tread grating
- Stainless steel anchor straps
- Floor trough pitched 1" (25) to center drain
- NSF listed, made in U.S.A.

BENEFITS

- Virtually eliminates building drain clogs; no more building maintenance service calls
- Fewer clogs mean no trough overflow and leaks through surrounding tile and grout
- Significantly decreases the amount of sediment entering grease traps; grease traps will work more efficiently
- Decreased sediments reduce grease trap clogs and extends service intervals
- Prevents free standing water
- Minimizes slips and falls

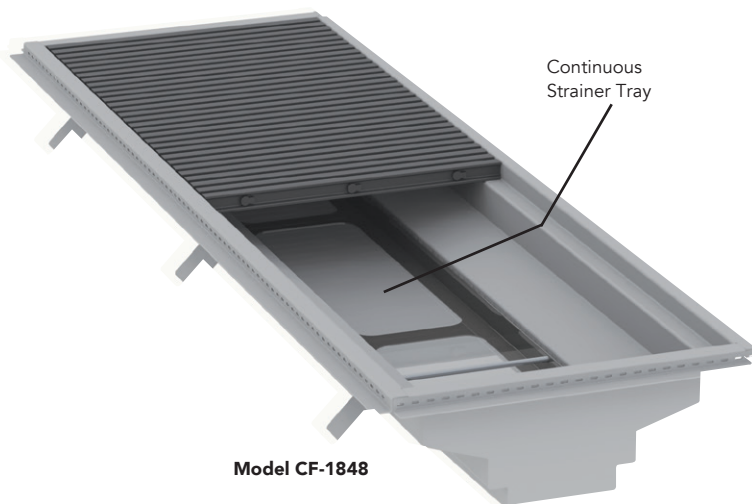

Featured In



AutoQuotes KCL CADalog



Made To Drain

4900 W. Electric Avenue • West Milwaukee, WI 53219


Sales & Service: (P) 866.895.7264 • (F) 414.902.6564 • info@madetodrain.com

madetodrain.com


Clog-Free Floor Troughs

SPECIFICATIONS

Floor modules to be constructed of 14-gauge Type-304 stainless steel, designed in compliance and certified with all applicable NSF and NFSI standards. Trough contains unique grout locking holes spaced every $\frac{3}{4}$ " (19) around outside perimeter. Trough pan sides are sloped towards center collection strainer tray. Pan floor has a 1" (25) pitch to center, with $3\frac{1}{2}$ " (89) O.D. drain to mate to 3" (76) no hub connection to grease interceptor. Full length stainless steel strainer trays to have $\frac{1}{8}$ " (3) perforated pattern, with handles on both ends. Maximum strainer tray length is 5' (1.52 m) long. Troughs are supplied with light-weight removable anti-slip reinforced fiberglass tread grate(s) with 40% open area. Grates are non-conductive, corrosion-resistant, fire-retardant, and ADA-compliant.

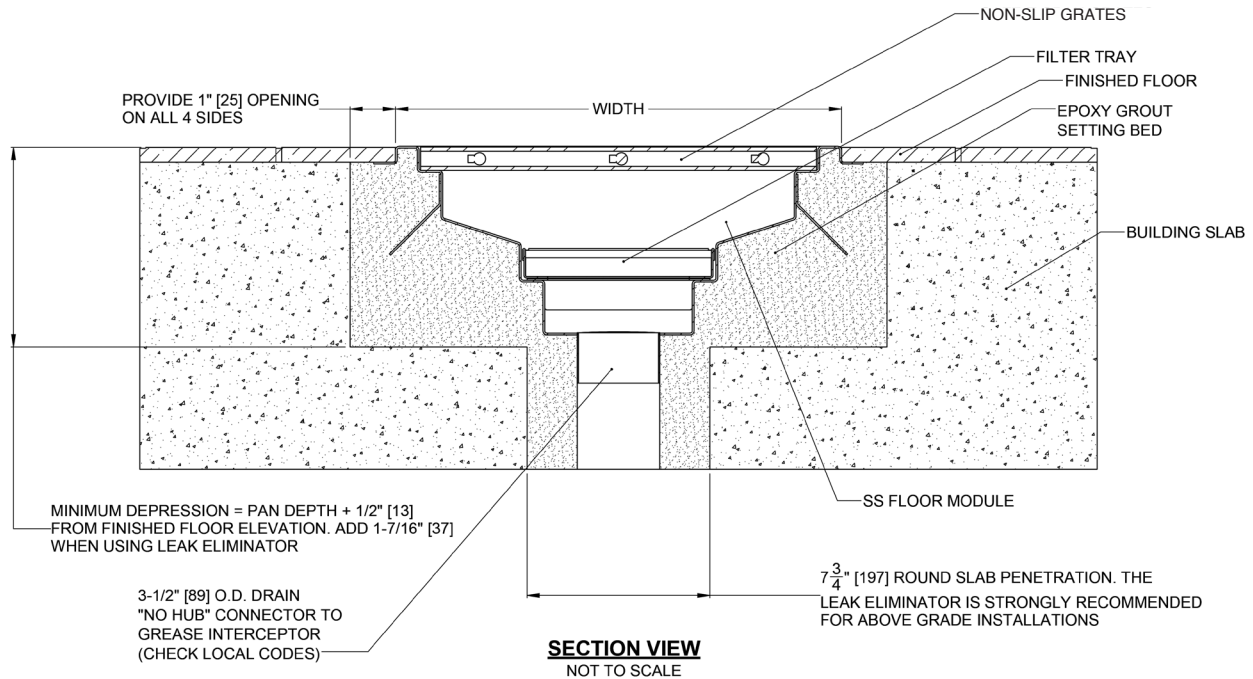

TYPICAL CF FLOOR TROUGH SLAB ON GRADE INSTALLATION

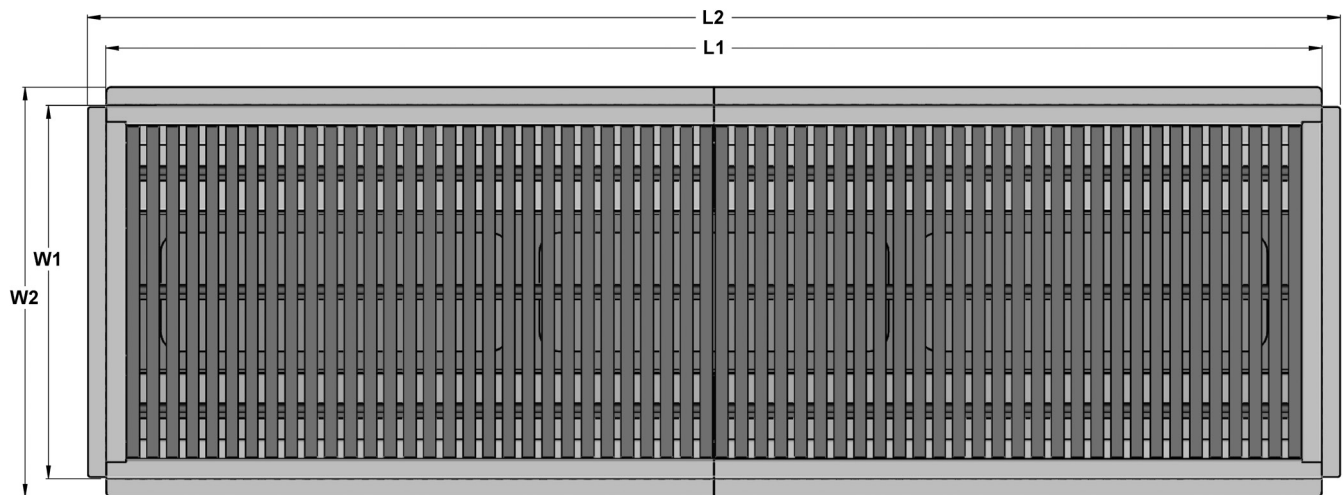

PLAN VIEW

Clog-Free Floor Troughs

SALES & SERVICE: (P) 866.895.7264 • (F) 414.902.6564

MODEL INFORMATION

MODEL	WIDTH		LENGTH		DEPTH	# OF GRATES	MODEL	WIDTH		LENGTH		DEPTH	# OF GRATES
	W1	W2	L1	L2				W1	W2	L1	L2		
CF-1220	12 7/8"	14 3/4"	21 3/4"	23 5/8"	7 1/8"	1	CF-1896	18 7/8"	20 3/4"	97 1/2"	99 3/8"	7 1/8"	5
	(327)	(375)	(552)	(600)	(181)			(479)	(527)	(2477)	(2524)	(181)	
CF-1224	12 7/8"	14 3/4"	26 1/2"	28 3/8"	7 1/8"	2	CF-18100	18 7/8"	20 3/4"	100 1/2"	102 3/8"	7 1/8"	5
	(327)	(375)	(673)	(721)	(181)			(479)	(527)	(2553)	(2600)	(181)	
CF-1230	12 7/8"	14 3/4"	29 1/2"	31 3/8"	7 1/8"	2	CF-18108	18 7/8"	20 3/4"	109 3/4"	111 5/8"	7 1/8"	6
	(327)	(375)	(749)	(797)	(181)			(479)	(527)	(2788)	(2835)	(181)	
CF-1236	12 7/8"	14 3/4"	37"	38 7/8"	7 1/8"	2	CF-18120	18 7/8"	20 3/4"	120 3/16"	122 1/16"	7 1/8"	6
	(327)	(375)	(940)	(987)	(181)			(479)	(527)	(3053)	(3100)	(181)	
CF-1240	12 7/8"	14 3/4"	41 7/16"	43 5/16"	7 1/8"	2	CF-18140	18 7/8"	20 3/4"	139 7/8"	141 3/4"	7 1/8"	7
	(327)	(375)	(1053)	(1100)	(181)			(479)	(527)	(3553)	(3600)	(181)	
CF-1242	12 7/8"	14 3/4"	43 1/4"	45 1/8"	7 1/8"	3	CF-2420	24 7/8"	26 3/4"	21 3/4"	23 5/8"	7 1/8"	1
	(327)	(375)	(1099)	(1449)	(181)			(632)	(679)	(552)	(600)	(181)	
CF-1248	12 7/8"	14 3/4"	49 3/16"	51 1/16"	7 1/8"	3	CF-2424	24 7/8"	26 3/4"	26 9/16"	28 3/8"	7 1/8"	2
	(327)	(375)	(1249)	(1297)	(181)			(632)	(679)	(675)	(721)	(181)	
CF-1254	12 7/8"	14 3/4"	55 3/16"	57 1/16"	7 1/8"	3	CF-2430	24 7/8"	26 3/4"	29 1/2"	31 3/8"	7 1/8"	2
	(327)	(375)	(1402)	(1449)	(181)			(632)	(679)	(749)	(797)	(181)	
CF-1260	12 7/8"	14 3/4"	61 1/8"	63"	7 1/8"	3	CF-2436	24 7/8"	26 3/4"	37"	38 7/8"	7 1/8"	2
	(327)	(375)	(1553)	(1600)	(181)			(632)	(679)	(940)	(987)	(181)	
CF-1272	12 7/8"	14 3/4"	73 3/8"	75 1/4"	7 1/8"	4	CF-2440	24 7/8"	26 3/4"	41 7/16"	43 5/16"	7 1/8"	2
	(327)	(375)	(1864)	(1911)	(181)			(632)	(679)	(1053)	(1100)	(181)	
CF-1280	12 7/8"	14 3/4"	80 13/16"	82 11/16"	7 1/8"	4	CF-2442	24 7/8"	26 3/4"	43 1/4"	45 1/8"	7 1/8"	3
	(327)	(375)	(2053)	(2100)	(181)			(632)	(679)	(1099)	(1449)	(181)	
CF-1284	12 7/8"	14 3/4"	85 5/8"	87 1/2"	7 1/8"	5	CF-2448	24 7/8"	26 3/4"	49 1/4"	51 1/16"	7 1/8"	3
	(327)	(375)	(2175)	(2223)	(181)			(632)	(679)	(1251)	(1297)	(181)	
CF-1296	12 7/8"	14 3/4"	97 1/2"	99 3/8"	7 1/8"	5	CF-2454	24 7/8"	26 3/4"	55 3/16"	57 1/16"	7 1/8"	3
	(327)	(375)	(2477)	(2524)	(181)			(632)	(679)	(1402)	(1449)	(181)	
CF-12100	12 7/8"	14 3/4"	100 1/2"	102 3/8"	7 1/8"	5	CF-2460	24 7/8"	26 3/4"	61 1/8"	63"	7 1/8"	3
	(327)	(375)	(2553)	(2600)	(181)			(632)	(679)	(1553)	(1600)	(181)	
CF-12108	12 7/8"	14 3/4"	109 3/4"	111 5/8"	7 1/8"	6	CF-2472	24 7/8"	26 3/4"	73 3/8"	75 1/4"	7 1/8"	4
	(327)	(375)	(2788)	(2835)	(181)			(632)	(679)	(1864)	(1911)	(181)	
CF-12120	12 7/8"	14 3/4"	120 3/16"	122 1/16"	7 1/8"	6	CF-2480	24 7/8"	26 3/4"	80 13/16"	82 11/16"	7 1/8"	4
	(327)	(375)	(3053)	(3100)	(181)			(632)	(679)	(2053)	(2100)	(181)	
CF-12140	12 7/8"	14 3/4"	139 7/8"	141 3/4"	7 1/8"	7	CF-2484	24 7/8"	26 3/4"	85 5/8"	87 1/2"	7 1/8"	5
	(327)	(375)	(3553)	(3600)	(181)			(632)	(679)	(2175)	(2223)	(181)	
CF-1820	18 7/8"	20 3/4"	21 3/4"	23 5/8"	7 1/8"	1	CF-2496	24 7/8"	26 3/4"	97 1/2"	99 3/8"	7 1/8"	5
	(479)	(527)	(552)	(600)	(181)			(632)	(679)	(2477)	(2524)	(181)	
CF-1824	18 7/8"	20 3/4"	26 9/16"	28 3/8"	7 1/8"	2	CF-24100	24 7/8"	26 3/4"	100 1/2"	102 3/8"	7 1/8"	5
	(479)	(527)	(675)	(721)	(181)			(632)	(679)	(2553)	(2600)	(181)	
CF-1830	18 7/8"	20 3/4"	29 1/2"	31 3/8"	7 1/8"	2	CF-24108	24 7/8"	26 3/4"	109 3/4"	111 5/8"	7 1/8"	6
	(479)	(527)	(749)	(797)	(181)			(632)	(679)	(2788)	(2835)	(181)	
CF-1836	18 7/8"	20 3/4"	37"	38 7/8"	7 1/8"	2	CF-24120	24 7/8"	26 3/4"	120 3/16"	122 1/16"	7 1/8"	6
	(479)	(527)	(940)	(987)	(181)			(632)	(679)	(3053)	(3100)	(181)	
CF-1840	18 7/8"	20 3/4"	41 7/16"	43 5/16"	7 1/8"	2	CF-24140	24 7/8"	26 3/4"	139 7/8"	141 3/4"	7 1/8"	7
	(479)	(527)	(1053)	(1100)	(181)			(632)	(679)	(3553)	(3600)	(181)	
CF-1842	18 7/8"	20 3/4"	43 1/4"	45 1/8"	7 1/8"	3	CF-3020	30 7/8"	32 3/4"	21 3/4"	23 5/8"	8"	1
	(479)	(527)	(1099)	(1449)	(181)			(784)	(832)	(552)	(600)	(203)	
CF-1848	18 7/8"	20 3/4"	49 1/4"	51 1/16"	7 1/8"	3	CF-3024	30 7/8"	32 3/4"	26 9/16"	28 3/8"	8"	2
	(479)	(527)	(1251)	(1297)	(181)			(784)	(832)	(675)	(721)	(203)	
CF-1854	18 7/8"	20 3/4"	55 3/16"	57 1/16"	7 1/8"	3	CF-3030	30 7/8"	32 3/4"	29 1/2"	31 3/8"	8"	2
	(479)	(527)	(1402)	(1449)	(181)			(784)	(832)	(749)	(797)	(203)	
CF-1860	18 7/8"	20 3/4"	61 1/8"	63"	7 1/8"	3	CF-3036	30 7/8"	32 3/4"	37"	38 7/8"	8"	2
	(479)	(527)	(1553)	(1600)	(181)			(784)	(832)	(940)	(987)	(203)	
CF-1872	18 7/8"	20 3/4"	73 3/8"	75 1/4"	7 1/8"	4	CF-3040	30 7/8"	32 3/4"	41 7/16"	43 5/16"	8"	2
	(479)	(527)	(1864)	(1911)	(181)			(784)	(832)	(1053)	(1100)	(203)	
CF-1880	18 7/8"	20 3/4"	80 13/16"	82 11/16"	7 1/8"	4	CF-3042	30 7/8"	32 3/4"	43 1/4"	45 1/8"	8"	3
	(479)	(527)	(2053)	(2100)	(181)			(784)	(832)	(1099)	(1449)	(203)	
CF-1884	18 7/8"	20 3/4"	85 5/8"	87 1/2"	7 1/8"	5	CF-3048	30 7/8"	32 3/4"	49 1/4"	51 1/16"	8"	3
	(479)	(527)	(2053)	(2100)	(181)			(784)	(832)	(1251)	(1297)	(203)	

more models ->

Clog-Free Floor Troughs

PROJECT #: _____

ITEM #: _____

MODEL INFORMATION *(continued)*

MODEL	WIDTH		LENGTH		DEPTH	# OF GRATES	MODEL	WIDTH		LENGTH		DEPTH	# OF GRATES
	W1	W2	L1	L2				W1	W2	L1	L2		
CF-3054	30 7/8"	32 3/4"	55 3/16"	57 1/16"	8"	3	CF-3640	36 7/8"	38 3/4"	41 7/16"	43 5/16"	9"	2
	(784)	(832)	(1402)	(1449)	(203)			(937)	(984)	(1053)	(1100)	(229)	
CF-3060	30 7/8"	32 3/4"	61 1/8"	63"	8"	3	CF-3642	36 7/8"	38 3/4"	43 1/4"	45 1/8"	9"	3
	(784)	(832)	(1553)	(1600)	(203)			(937)	(984)	(1099)	(1449)	(229)	
CF-3072	30 7/8"	32 3/4"	73 3/8"	75 1/4"	8"	4	CF-3648	36 7/8"	38 3/4"	49 1/4"	51 1/16"	9"	3
	(784)	(832)	(1864)	(1911)	(203)			(937)	(984)	(1251)	(1297)	(229)	
CF-3080	30 7/8"	32 3/4"	80 13/16"	82 11/16"	8"	4	CF-3654	36 7/8"	38 3/4"	55 3/16"	57 1/16"	9"	3
	(784)	(832)	(2053)	(2100)	(203)			(937)	(984)	(1402)	(1449)	(229)	
CF-3084	30 7/8"	32 3/4"	85 5/8"	87 1/2"	8"	5	CF-3660	36 7/8"	38 3/4"	61 1/8"	63"	9"	3
	(784)	(832)	(2175)	(2223)	(203)			(937)	(984)	(1553)	(1600)	(229)	
CF-3096	30 7/8"	32 3/4"	97 1/2"	99 3/8"	8"	5	CF-3672	36 7/8"	38 3/4"	73 3/8"	75 1/4"	9"	4
	(784)	(832)	(2477)	(2524)	(203)			(937)	(984)	(1864)	(1911)	(229)	
CF-30100	30 7/8"	32 3/4"	100 1/2"	102 3/8"	8"	5	CF-3680	36 7/8"	38 3/4"	80 13/16"	82 11/16"	9"	4
	(784)	(832)	(2553)	(2600)	(203)			(937)	(984)	(2053)	(2100)	(229)	
CF-30108	30 7/8"	32 3/4"	109 3/4"	111 5/8"	8"	6	CF-3684	36 7/8"	38 3/4"	85 5/8"	87 1/2"	9"	5
	(784)	(832)	(2788)	(2835)	(203)			(937)	(984)	(2175)	(2223)	(229)	
CF-30120	30 7/8"	32 3/4"	120 3/16"	122 1/16"	8"	6	CF-3696	36 7/8"	38 3/4"	97 1/2"	99 3/8"	9"	5
	(784)	(832)	(3053)	(3100)	(203)			(937)	(984)	(2477)	(2524)	(229)	
CF-30140	30 7/8"	32 3/4"	139 7/8"	141 3/4"	8"	7	CF-36100	36 7/8"	38 3/4"	100 1/2"	102 3/8"	9"	5
	(784)	(832)	(3553)	(3600)	(203)			(937)	(984)	(2553)	(2600)	(229)	
CF-3620	36 7/8"	38 3/4"	21 3/4"	23 5/8"	9"	1	CF-36108	36 7/8"	38 3/4"	109 3/4"	111 5/8"	9"	6
	(937)	(984)	(552)	(600)	(229)			(937)	(984)	(2788)	(2835)	(229)	
CF-3624	36 7/8"	38 3/4"	26 9/16"	28 3/8"	9"	2	CF-36120	36 7/8"	38 3/4"	120 3/16"	122 1/16"	9"	6
	(937)	(984)	(675)	(721)	(229)			(937)	(984)	(3053)	(3500)	(229)	
CF-3630	36 7/8"	38 3/4"	29 1/2"	31 3/8"	9"	2	CF-36140	36 7/8"	38 3/4"	139 7/8"	141 3/4"	9"	6
	(937)	(984)	(749)	(797)	(229)			(937)	(984)	(3553)	(3600)	(229)	
CF-3636	36 7/8"	38 3/4"	37"	38 7/8"	9"	2							
	(937)	(984)	(940)	(987)	(229)								

OPTIONS

- ☐ Shallow depth _____"
- ☐ Removable braces for high-load applications
- ☐ Stainless steel drain pan (see separate specification sheet)
- ☐ Leak Eliminator™ drain connector for above-grade installations (see separate specification sheet)
- ☐ Yellow color fiberglass grating
- ☐ Stainless steel subway style grating (see separate specification sheet)
- ☐ Lockdown correctional package with 1½" (38) lockdown grates
- ☐ Custom sizes and options, contact factory



4900 W. Electric Avenue • West Milwaukee, WI 53219

Sales & Service: (P) 866.895.7264 • (F) 414.902.6564

madetodrain.com

Made In



U.S.A.